MITSUBISHI HEAVY INDUSTRIES
AIR CONDITIONING EUROPE



SRK15ZS-WF

1.5kW

Specifications


Nominal cooling capacity		kW	1.5
Nominal heating capacity		kW	2.0
Sound power level	Cooling	dB(A)	48
	Heating	dB(A)	50
Sound pressure level	Cooling(Hi/Me/Lo/Ulo)	dB(A)	34 / 25 / 22 / 19
	Heating(Hi/Me/Lo/Ulo)	dB(A)	36 / 29 / 23 / 19
Air flow	Cooling(Hi/Me/Lo/Ulo)	m^3/min	9.3 / 7.0 / 5.9 / 5.0
	Heating(Hi/Me/Lo/Ulo)	m^3/min	10.0 / 8.5 / 6.5 / 5.9
Exterior dimensions (H×W×D)		mm	290×870×230
Net weight		kg	9.5
Refrigerant piping size	Liquid / Gas	mm (ø inch)	6.35(1/4") / 9.52(3/8")
Clean filter			Allergen Clear Filter × 1, Photocatalytic Washable Deodorizing Filter × 1


• The data is measured under the following conditions(ISO-T1, H1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB.
• Sound level the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.


Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.

Schematics

SRK15ZS-WF, -WFB, -WFT
SRK20ZS-WF, -WFB, -WFT, -W
SRK25ZS-WF, -WFB, -WFT, -W
SRK35ZS-WF, -WFB, -WFT, -W
SRK50ZS-WF, -WFB, -WFT, -W
SRK20ZS-S,-SB,-ST SRK25ZS-S,-SB,-ST
SRK35ZS-S,-SB,-ST SRK50ZS-S,-SB,-ST

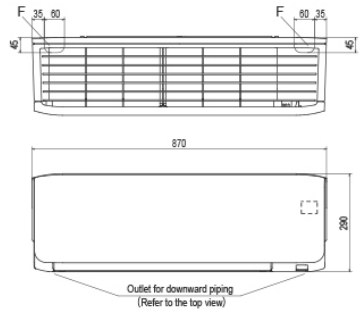



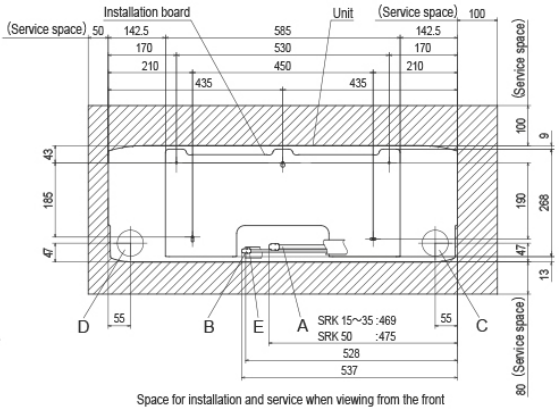

Space for installation and service when viewing from the front

Symbol	Content		
A	Gas piping	SRK15~35	ϕ9.52 (3/8") (Flare)
		SRK50	ϕ12.7 (1/2") (Flare)
B	Liquid piping	ϕ6.35 (1/4") (Flare)	
C	Hole on wall for right rear piping	(ϕ65)	
D	Hole on wall for left rear piping	(ϕ65)	
E	Drain hose	VP16	
F	Outlet for piping (on both side)		

Because of our policy of continuous improvement, we reserve the right to make changes in all specifications without notice.